



medical **ECONET**  
GERMANY



## Sonost 3000



Ultrasound bone densitometer with 6,4" touch screen

- Easy to operate by intuitive software and integrated PC
- USB Connection for an external printer, keyboard, mouse
- Comprehensive report by issuing T- and Z- Score
- High precision
- No radiation exposure
- Pediatric function
- VGA Output
- PACS compatibility

# Specifications

Performance	
Measurement	Calcaneus
Testing Time	ca. 15 seconds
Measurement Results	bone mineral density, bone quality index (BQI) deduced from BUA and SOS
Accuracy	SOS (C.V.%) 0,2; BUA (C.V.%) 1,5; BQI (C.V.%) 1,5
Operation	automatic moving ultrasound probes with gel pads (without water)
Probe Distance	25 mm - 100 mm
Printer	integrated thermal printer external printer (optional)
System Requirements	
Connectors	2xUSB, VGA, PS2, LAN, power connection
Data Input	by integrated touch screen display or external mouse and keyboard
Display	6,4" TFT color touch screen
Hard disc	storage of ca. 10.000 patient data
Environmental Conditions	
Operating Temperature	10 - 40 °C
Humidity	30 - 75 % relative humidity
Operating Voltage	AC 220V - 240V, 50 / 60 Hz
Dimensions & Weight	
Dimensions	32 cm x 62 cm x 30 cm
Weight	12 kg

# Software

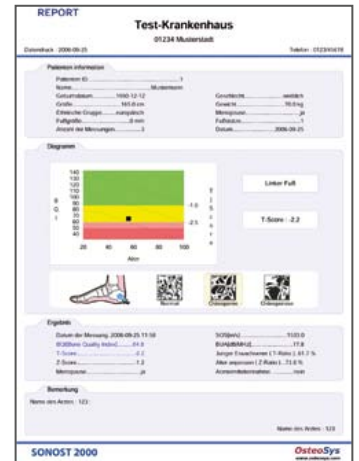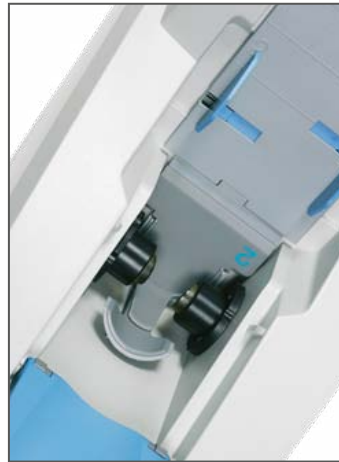

# Dimensions

32cm x 62cm x 30cm, about 12kg



Im Erlengrund 20, 46149 Oberhausen - Germany

t: +49 (0) 208 377 890-0 info@medical-econet.com  
 f: +49 (0) 208 377 890-55 www.medical-econet.com  
 facebook.com/medicaleconetgermany  
 twitter.com/medicaleconet

Distributor

CE 0120

\*All specifications are subject to change without notice